



**2024
PRODUCT
INTRODUCTION**

Digtal Pressure Gauge



CONTENTS

I. Product Overview 3

II. Features 3

III. Specifications 3

IV. Installation 4

V. Dimension(as following photo) 4

VI. User Notes 4

Company Profile

Weifang AOBO Instrument Technology Development Co., Ltd., founded in 2002, with registration capital of 10 million RMB, is a "High-Tech" and "Double-Software Certification" enterprise specialized in "flow measurement and intelligent measurement & control" industry, integrating R&D, production, sales and service.

The company has a core R&D team for computer software and technology, automatic intelligent control, HVAC engineering design and flow measurement. It has the ability to provide customers with specific solutions and complete sets of products according to their different needs, based on years of practical experience. Especially in the heating industry, by the customer's recognition, has a high reputation in the industry.

The products are mainly used in the measurement and control of "steam, liquid, gas, sewage and tap water"; and especially suitable for energy monitoring and energy-saving control in many industries, such as thermal power plants, thermal companies, residential heating, petroleum, chemical industry, papermaking, food, coating, printing & dyeing and HVAC.

Since its foundation, based on self-developed and leading technology, reliable quality, high-quality service and good reputation, our company has been warmly accepted by customers, and become a designated supplier for many central enterprises and listed companies.

Contact

AOBO Instrument Technology Development Co.,Ltd

No. 8009 Minzhu St.-Weifang,Shandong Province

261100,China

Mob.: +86 19953631088/+8619953631096

Email: aobometer@gmail.com

All of the catalogue and company information can be found at:

WWW.AOBOINSTRUMENT.COM

I. Product Overview

ABDT-YBY-108 Intelligent Digital Pressure Gauge is electronic-structure and battery-powered, which makes it very easy for on-site installation. Specifically, a high-precision piezo-resistive pressure sensor is used and the output signal is processed by the high-precision, low temperature drifting amplifier, then sent into the high-precision A/D converter to be converted into digital signal, after being computed and processed, the actual pressure value is showed on the LCD screen.



It has some benefits: flexible use, simple operation, easy debugging, safe, reliable etc. So they have been widely used in hydro-power, water, petroleum, chemical, mechanical, hydraulic and other industries to measure and display the pressure of the fluid medium.

II. Features

- ◆ Large-screen LCD display, back light, high resolution, easy to read;
- ◆ Automatically record the maximum pressure values during the measurement;
- ◆ Pressure on the percentage of dynamic display, (the progress bar display);
- ◆ Five engineering units: psi, bar, kpa, Mpa, kg / cm²;
- ◆ 0 ~ 15min auto-off feature;
- ◆ Micro-power consumption, work over 2 years in power-saving mode, 2,000 hours continuous work;
- ◆ Parameter correction, correct zero and error in field application;
- ◆ Pressure range already set before use;
- ◆ Sampling rate: 4 times / sec;
- ◆ Applicable to gases and liquids compatible with stainless steel.

III. Specifications


Pressure range	-0.1~0~100MPa	Accuracy	0.5%
----------------	---------------	----------	------

Overload capacity	200%	Pressure type	gauge pressure
Stability	$\leq 0.1\%$ /year	Battery voltage	9VDC
Display	LCD	Display range	-1999~9999
Application temperature	-10℃~95℃	Relative humidity	$\leq 80\%$
Mounting thread	1/2" BSP straight	Interface Material	Stainless Steel
Auto-shut off	15 minutes	Back light	5 minutes

IV. Installation

ABDT-YBY-108 can be directly mounted in the hydraulic pipe on the road through the mounting thread(1/2" BSP straight). In critical applications,such as severe vibration or shock, soft hose is strongly recommended to connect the digital pressure gauge to reduce the effect caused by the sever vibrations and shocks.

V. Dimension(as following photo)

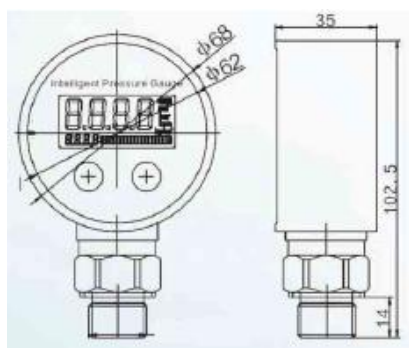

VI. User Notes

- 1) Stored and used in an environmental temperature of -10℃~ 60℃,the relative humidity less than 80%.
- 2) Should be concentric and parallel when connect digital pressure gauge and pressure system.
- 3) Please use 9V alkaline battery(6LR61) when replace the battery.

4) When installing the gauge, please use right way



Contact

AOBO Instrument Technology Development Co.,Ltd

No. 8009 Minzhu St.-Weifang,Shandong Province

261100,China

Mob.: +86 19953631088/+8619953631096

Email: aobometer@gmail.com

All of the catalogue and company information can be found at:

WWW.AOBOINSTRUMENT.COM